

CATALOG & PRICE LIST

WWW.MONKEYARMS.COM

NOVEMBER 2006



TABLE OF CONTENTS

* Terms & Conditions.....	1-2
* Company Information.....	2
* Extraction Arms & Cranes.....	3
* Exhaust Gas Hoses & Reels.....	13
* Filters: Stationary & Mobile.....	18
* Fans & Accessories.....	27

DIMENSIONS, ETC.

Monkey Arms are manufactured in metric sizes but described here and on the web site in their closest English equivalent. Representative sizes and dimensions are described here. Custom sizes and materials are available.

Diameters:
 63 mm: 2.5 inches
 75 mm: 3 inches
 100 mm: 4 inches
 125 mm: 5 inches
 160 mm: 6 inches
 200 mm: 8 inches

Lengths:
 1.5m: 5 feet
 2.0m: 6 feet
 3.0m: 10 feet
 4.0m: 13 feet
 5.0m: 16 feet
 6.0m: 20 feet
 7.0m: 23 feet
 8.0m: 26 feet
 9.0m: 30 feet

WWW.MONKEYARMS.COM

Komodo Enterprises, Inc. DBA
 Monkey Arms
 2620 S. Maryland Pkwy
 Suite 14, Box 863
 Las Vegas, NV 89109

California Office
 8915 Research Dr.
 Irvine CA, 92618

Tel: 949.341.0314
 Fax: 949.341.0315

E-mail: info@monkeyarms.com



*Tough, Durable,
 Rugged, Reliable,
 Stout Construction*

Visit all our web sites:
 WWW.DUSTMONKEY.NET
 WWW.DUCTMONKEY.NET
 WWW.MONKEYARMS.COM



*Experts in Dust, and
 Fume Control.*

WWW.MONKEYARMS.COM

MODELS AVAILABLE

FEATURES	PARALLELOGRAM TECHNOLOGY	ADVANCED STABILITY	MATERIALS	FINISH	SUPPORT ARM	HOOD DESIGN	AUTOCLAV-ABLE?
F	X		MILD STEEL	POWDER COATED	INSIDE	DUST	
PF	X	X	MILD STEEL	POWDER COATED	OUTSIDE	DUST	
SM	X	X	MILD STEEL	POWDER COATED	OUTSIDE	DUST	
SV	X	X	MILD STEEL	POWDER COATED	OUTSIDE	DUST	
CPF	X	X	STAINLESS STEEL	MIRROR POLISHED OR POWDER COATED	OUTSIDE	DUST/ SMOKE/ GAS	X

DIAMETERS AVAILABLE	2.5"	3"	4"	5"	6"	8"
F					X	X
PF					X	X
SM		X	X	X	X	X
SV	X	X				
CPF			X		X	

LENGTHS AVAILABLE	5'	6'	10'	13'	16'	20'	23'	26'	30'
F	X	X	X	X	X	X	X	X	X
PF		X	X	X	X	X	X	X	
SM	X	X	X	X	X	X	X	X	
SV	X	X	X	X	X	X	X	X	
CPF	X	X	X	X					

TERMS AND CONDITIONS

PAYMENTS AND TERMS

Prices quoted are good for 30 days unless otherwise noted. Monkey Arms accepts cash, check, wire transfer, or credit cards. All prices are quote in US Dollars, unless otherwise noted. All sales are final. All freight is FOB, Las Vegas, Nevada unless otherwise noted. All goods remain the property of Monkey Arms until paid in full. Payment is due at time of order unless credit has been granted. All past due accounts accrue a service fee of 3% per month. Monkey Arms is a DBA of Komodo Enterprises, Inc., a Nevada Corporation.

PRIVACY STATEMENT

Komodo Enterprises Inc. respects your privacy and will not divulge your contact information to any third party organization or entity without your express permission. In addition, our web sites gather no unauthorized information from your computer during your visit with us. All phone calls to Monkey Arms maybe monitored or recorded.

ACCURACY

Monkey Arms assumes no responsibility for errors or omissions in this web site or documents which are referenced by or linked to this site. This site could include technical or other inaccuracies. Changes are periodically added to the information, and Monkey Arms may change the products or services described at any time. Contact Customer Service for further information before relying on any information contained herein. The information provided on this site, including text, images, and links, are provided "AS IS" by Monkey Arms solely as a convenience to its visitors. This information is without any warranties, express or implied, including but not limited to warranties of merchantability, fitness for a particular purpose or non-infringement.

WARRANTY & INDEMNITY

Monkey Arms warrants products it manufactures for a period of 90 days to the original purchaser from the date of purchase. Items not manufactured by Monkey Arms are limited to their own manufacturer's warranties. This warranty does not apply to defects due directly or indirectly to misuse, negligence, accidents, abuse, repairs, or alterations or lack of maintenance. This is Monkey Arms sole written warranty and any and all warranties that may be implied by law, including any merchantability or fitness, for any particular purpose, are hereby limited to the duration of this written warranty. Monkey Arms does not warrant or represent that the merchandise complies with the provisions of any law or acts. In no event shall Monkey Arms liability under this warranty exceed the purchase price paid for the product. Both parties agree to binding arbitration in Las Vegas, Nevada. Monkey Arms shall in no event be liable for death, injuries to persons or property or for incidental, and contingent, special, or consequential damages arising from the use of our products. Monkey Arms warrants products only for the specific use expressly agreed to at time of purchase by Monkey Arms in writing. Motors should only be started and stopped up to 4 - 10 times per hour. Starting motors more frequently can cause heat build up and can cause the motor overload to trip or cause motor damage. In general, motors should be started and stopped as little as possible for maximum lifespan and best economy (electrical use). *Note: Motors should be protected from extreme weather to prolong motor life. All claims, including claims covered under the limited warranty, are subject to inspection and investigation before Buyer's claim is settled. Any parts returned for warranty or repair will not be accepted without an RMA number and must be shipped pre-paid. Contact Customer Service with the original bill of sale to obtain an RMA number.



MONKEY ARM F

WWW.MONKEYARMS.COM

SPECIFICATIONS

The Monkey Arm F is the most economical line of high-quality arms that we sell and is perfect for non-mist, non-abrasive ventilation of fumes, gasses, and dry dusts. The design is compact, smooth, and perfect for areas with low ceilings. The arm is internally supported, with modern parallelogram technology that makes it easy to move but stable once positioned. The arm has a strong powder-coated steel hood to withstand sparks, heat, and



chemicals. The flat shape around the inlet of the hood gives a directional suction effect, which optimizes suction power. The hood can be maneuvered over a 110° range and is standard-equipped with a straight hood for capturing dust.

The internal arms are powder-coated steel and are available for mounting from the wall, ceiling, table, or mobile or wall-mount filters. The arm is available in 6-inch and 8-

FEATURES

- * Our most economical arm—perfect for welding and soldering applications!
- * Internal support arm, extremely maneuverable modern parallelogram technology with ball-bearing disc brakes for stability
- * Available for mounting from ceiling, tables, and mobile filters
- * Standard in 6" or 8" diameter
- * Lengths to 30 feet

OPTIONS

- * Halogen Lamp Cartridge
- * Wall Mount Bracket
- * Floor & Ceiling Mounting Stand
- * Exhaust Fan Integral with Arm
- * Mobile or Wall-Mount Filter Box
- * Custom orders (diameters/lengths/materials) are available.

DIMENSIONS, ETC.

Monkey Arms are manufactured in metric sizes but described here and on the web site in their closest English equivalent. Representative sizes and dimensions are described here. Custom sizes and materials are available.

Diameters:
 63 mm: 2.5 inches
 75 mm: 3 inches
 100 mm: 4 inches
 125 mm: 5 inches
 160 mm: 6 inches
 200 mm: 8 inches

Lengths:
 1.5m: 5 feet
 2.0m: 6 feet
 3.0m: 10 feet
 4.0m: 13 feet
 5.0m: 16 feet
 6.0m: 20 feet
 7.0m: 23 feet
 8.0m: 26 feet
 9.0m: 30 feet



MONKEY ARM PF

WWW.MONKEYARMS.COM

SPECIFICATIONS

The Monkey Arm PF is our model created with more demanding applications in mind and is perfect for non-mist, non-abrasive ventilation of fumes, gasses, and dry dusts. The arm is externally supported, with modern parallelogram technology that makes it easy to move. External disc-brakes at vertical joints make the arm extremely stable once positioned and allow for hoods up to 20 pounds. The arm has a strong powder-coated steel hood to withstand sparks, heat, and chemicals. The



flat shape around the inlet of the hood gives a directional suction effect, which optimizes suction power. The hood can be maneuvered over a 110° range and is standard-equipped with a straight hood for capturing dust.

The arms are powder-coated steel and are available for mounting from the wall, ceiling, table, or wall-mount filters. The arms are available in 6-inch and 8-inch diameters and in lengths from 7 feet to 27

FEATURES

- * Our medium-specification arm—perfect for welding and soldering applications!
- * External support arm, extremely maneuverable modern parallelogram technology with disc-brakes at vertical joints for enhanced stability
- * Available for mounting from ceiling, tables, and wall-mount filters
- * Standard in 6" or 8" diameter
- * Lengths to 27 feet

OPTIONS

- * Halogen Lamp Cartridge
- * Wall Mount Bracket
- * Floor & Ceiling Mounting Stand
- * Exhaust Fan Integral with Arm
- * Wall-Mount Filter Box
- * Custom orders (diameters/lengths/materials) are available.

DIMENSIONS, ETC.

Monkey Arms are manufactured in metric sizes but described here and on the web site in their closest English equivalent. Representative sizes and dimensions are described here. Custom sizes and materials are available.

Diameters:
 63 mm: 2.5 inches
 75 mm: 3 inches
 100 mm: 4 inches
 125 mm: 5 inches
 160 mm: 6 inches
 200 mm: 8 inches

Lengths:
 1.5m: 5 feet
 2.0m: 6 feet
 3.0m: 10 feet
 4.0m: 13 feet
 5.0m: 16 feet
 6.0m: 20 feet
 7.0m: 23 feet
 8.0m: 26 feet
 9.0m: 30 feet



MONKEY ARM SM

WWW.MONKEYARMS.COM

SPECIFICATIONS

The Monkey Arm SM is specially designed to handle large working areas. This is our toughest arm, created with the harshest environments in mind and is perfect for non-mist, non-abrasive ventilation of fumes, gasses, and dry dusts. The arm is externally supported, with modern parallelogram technology that makes it easy to move. External hydraulic suspension makes the arm extremely stable once positioned. The arm has a strong powder-coated steel hood to withstand sparks, heat, and chemicals. The flat



shape around the inlet of the hood gives a directional suction effect, which optimizes suction power. The hood can be maneuvered over a 110° range and is standard-equipped with a straight hood for capturing dust. The arm has a built-in adjustable damper and low

pressure drop for increased air flow. The arm is designed for mounting from the wall or ceiling. The arm is available in 3-, 4-, 5-, 6-inch and 8-inch diameters

FEATURES

- * Our high-specification (non-stainless) arm—perfect for large working areas!
- * External support arm, extremely maneuverable modern parallelogram technology with hydraulic-suspension for enhanced stability.
- * Available for mounting from wall, ceiling, or floor.
- * Standard in 3", 4", 5", 6" or 8" diameter
- * Lengths to 30 feet

OPTIONS

- * Halogen Lamp Cartridge
- * Wall Mount Bracket
- * Floor & Ceiling Mounting Stand
- * Exhaust Fan Integral with Arm
- * Custom orders (diameters/lengths/materials) are available.

DIMENSIONS, ETC.

Monkey Arms are manufactured in metric sizes but described here and on the web site in their closest English equivalent. Representative sizes and dimensions are described here. Custom sizes and materials are available.

Diameters:
 63 mm: 2.5 inches
 75 mm: 3 inches
 100 mm: 4 inches
 125 mm: 5 inches
 160 mm: 6 inches
 200 mm: 8 inches

Lengths:
 1.5m: 5 feet
 2.0m: 6 feet
 3.0m: 10 feet
 4.0m: 13 feet
 5.0m: 16 feet
 6.0m: 20 feet
 7.0m: 23 feet
 8.0m: 26 feet
 9.0m: 30 feet




MONKEY ARM SV

WWW.MONKEYARMS.COM

SPECIFICATIONS

The Monkey Arm SV arm ensures a high-quality, high-vacuum installation. Quick and easy handling of the extraction hood is essential when the hood has to be repositioned quickly. The arm is perfect for non-mist, non-abrasive ventilation of fumes, gasses, and dry dusts. The arm is externally supported, with modern parallelogram technology that makes it easy to move. External hydraulic suspension makes the arm extremely stable once positioned and ball-bearing mounts with disc-brakes

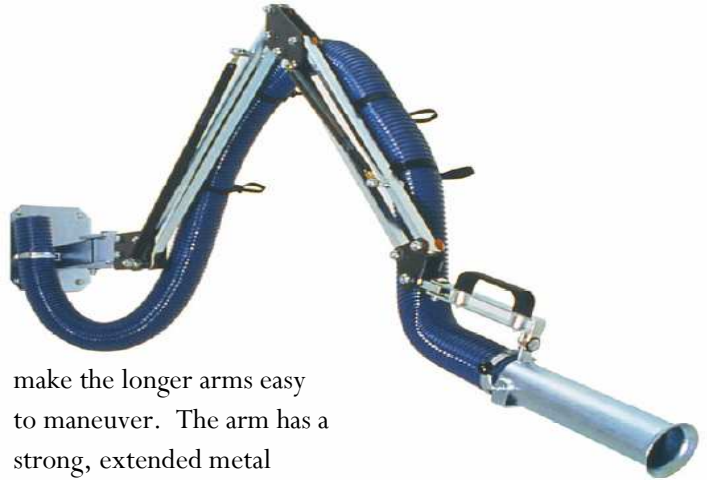

make the longer arms easy to maneuver. The arm has a strong, extended metal hood to facilitate the capture of metal sparks. The hood can be maneuvered over a 110° range and is standard-equipped with a straight hood for capturing dust.

The arm has a built-in adjustable damper and low pressure drop for increased air flow. The arm is available for mounting from the wall, floor, or ceiling. The arm is available in 2.5-inch and 3-inch diameters

FEATURES

- * Our specialty arm for high-vacuum applications!
- * External support arm, extremely maneuverable modern parallelogram technology with hydraulic-suspension for enhanced stability. Larger models equipped with ball-bearing mounts and disc-brakes for easy maneuvering and stability.
- * Available for mounting from wall/ceiling/floor.
- * Standard in 2.5" and 3" diameter
- * Lengths to 27 feet

OPTIONS

- * Wall Mount Bracket
- * Floor & Ceiling Mounting Stand
- * Custom orders (diameters/lengths/materials) are available.

DIMENSIONS, ETC.

Monkey Arms are manufactured in metric sizes but described here and on the web site in their closest English equivalent. Representative sizes and dimensions are described here. Custom sizes and materials are available.

Diameters:
 63 mm: 2.5 inches
 75 mm: 3 inches
 100 mm: 4 inches
 125 mm: 5 inches
 160 mm: 6 inches
 200 mm: 8 inches

Lengths:
 1.5m: 5 feet
 2.0m: 6 feet
 3.0m: 10 feet
 4.0m: 13 feet
 5.0m: 16 feet
 6.0m: 20 feet
 7.0m: 23 feet
 8.0m: 26 feet
 9.0m: 30 feet




MONKEY ARM CPF

WWW.MONKEYARMS.COM

SPECIFICATIONS

The Monkey Arm CPF is designed specifically for tough applications in the chemical, pharmaceutical, and food industries. The arm is constructed of stainless steel components (all the way down to the nuts and bolts!) and is available in either acid-resistant mirror polished stainless steel or powder coated finishes. The arm is simple to clean and is autoclavable to allow for easy sterilization. The arm is available with multiple computer-designed hoods to allow for the efficient

capture of dust, smoke, or gasses. This arm is available in an explosion-proof design as well. The arm is perfect for non-mist, non-abrasive ventilation of fumes, gasses, and dry dusts. The arm is externally supported, with modern parallelogram technology that makes it easy to move. External hydraulic suspension makes the arm easy to position and

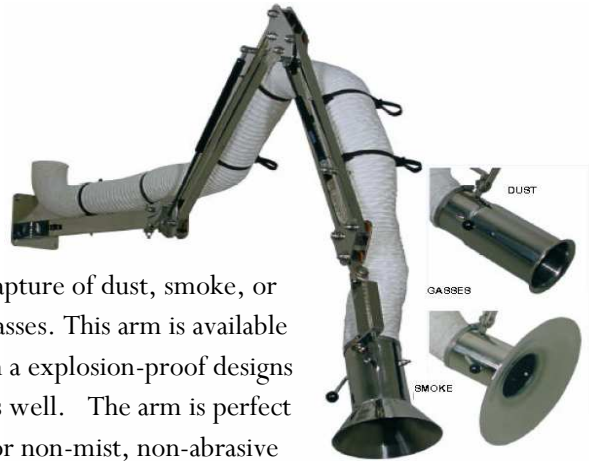

extremely stable. The arm has sealed tubes for maximum hygiene and easy disinfection. The arm is available for mounting from the wall, floor, or ceiling. The arm is available in 4-inch and 6-inch diameters

FEATURES

- * Our highest-specification arm designed for chemical, pharmaceutical, and food applications. All stainless components—down to the nuts and bolts!
- * External support arm, extremely maneuverable modern parallelogram technology with hydraulic-suspension for enhanced stability.
- * Sealed arms for maximum hygiene.
- * Standard in 4" and 6" diameters
- * Lengths to 13 feet

OPTIONS

- * Dust, Smoke, or Gas Hood
- * Explosion-Proof Design
- * Autoclavable
- * Mirror-Polished Stainless (CPF-M),
- * Mirror-Polished Hood with Powder-Coated Arms (CPF-PM)
- * Powder-Coated Hood and Arms (CPF-P)
- * Custom orders (diameters/lengths/materials) are available.

DIMENSIONS, ETC.

Monkey Arms are manufactured in metric sizes but described here and on the web site in their closest English equivalent. Representative sizes and dimensions are described here. Custom sizes and materials are available.

Diameters:
 63 mm: 2.5 inches
 75 mm: 3 inches
 100 mm: 4 inches
 125 mm: 5 inches
 160 mm: 6 inches
 200 mm: 8 inches

Lengths:
 1.5m: 5 feet
 2.0m: 6 feet
 3.0m: 10 feet
 4.0m: 13 feet
 5.0m: 16 feet
 6.0m: 20 feet
 7.0m: 23 feet
 8.0m: 26 feet
 9.0m: 30 feet



MONKEY HOSE REEL

WWW.MONKEYARMS.COM

SPECIFICATIONS

The Monkey Arm Hose Reel are designed to extract car and truck exhaust gasses at the tail pipe and exhaust them outside the building. The hose reel is spring operated with a locking mechanism and can be equipped with exhaust hoses from 25 to 33 feet. The hose reel can be equipped with either 3-inch, 4-inch, 5-inch, or 6-inch hose and with either a steel or EPDM nozzle. The nozzles have a test opening that allows for carbon dioxide testing.



The hose reel can be wall mounted or mounted on a horizontal extraction arm to service a wider area. Integral fans of either 1/2-HP or 1HP are available in single-phase or three-phase power. The reel and frame are made from powder-coated steel—the

drum is made from aluminum. Horizontal suspension arms are available in lengths of 1.5

FEATURES

- * Our economical hose reel —perfect for firehouse and auto repair shop applications!
- * Powder-coated steel housing and frame; aluminum drum.
- * Spring-operated with locking mechanism.
- * Hoses in 3", 4", 5" and 6" diameters.
- * Hose lengths from 25 to 33 feet.

OPTIONS

- * Drum width—2 feet, 3 feet, or 4 feet
- * Exhaust hose type and diameter—3", 4", 5" or 6"
- * Exhaust gas nozzle—steel or EPDM.
- * Integral Fan—1/2 HP or 1 HP. Single-phase or three-phase.
- * Horizontal arm mounting. Arm length from 1.5 feet to 13 feet (not for lifting).

DIMENSIONS, ETC.

Monkey Arms are manufactured in metric sizes but described here and on the web site in their closest English equivalent. Representative sizes and dimensions are described here. Custom sizes and materials are available.

Diameters:
 63 mm: 2.5 inches
 75 mm: 3 inches
 100 mm: 4 inches
 125 mm: 5 inches
 160 mm: 6 inches
 200 mm: 8 inches

Lengths:
 1.5m: 5 feet
 2.0m: 6 feet
 3.0m: 10 feet
 4.0m: 13 feet
 5.0m: 16 feet
 6.0m: 20 feet
 7.0m: 23 feet
 8.0m: 26 feet
 9.0m: 30 feet



MONKEY HOSE—WMM

WWW.MONKEYARMS.COM

SPECIFICATIONS

The Monkey Arm Wall Mount hose is designed to extract car and truck exhaust gasses at the tail pipe and exhaust them outside the building. The wall mount unit can be equipped with exhaust hoses from 7 to 20 feet. The hose can be either 3-inch, 4-inch, 5-inch, or 6-inch hose and with either a steel or EPDM nozzle. The nozzles have a test opening that allows for carbon dioxide testing. The wall mount can be equipped with either one



or two hoses. Integral fans of either ½-HP or 1HP are available in single-phase or three-phase power. The frame is made from powder-coated steel. Various hose specifications are available for different

FEATURES

- * Our economical wall mount unit for exhaust hose—perfect for auto repair shop applications!
- * Powder-coated steel frame.
- * Hoses in 3", 4", 5" and 6" diameters.
- * Hose lengths from 7 to 20 feet.

OPTIONS

- * Exhaust hose type and diameter—3", 4", 5" or 6"
- * Exhaust gas nozzle—steel or EPDM.
- * Integral Fan—½ HP or 1 HP. Single-phase or three-phase.
- * Hose holder for either bracket (integral) or wall-mount.

DIMENSIONS, ETC.

Monkey Arms are manufactured in metric sizes but described here and on the web site in their closest English equivalent. Representative sizes and dimensions are described here. Custom sizes and materials are available.

Diameters:
 63 mm: 2.5 inches
 75 mm: 3 inches
 100 mm: 4 inches
 125 mm: 5 inches
 160 mm: 6 inches
 200 mm: 8 inches

Lengths:
 1.5m: 5 feet
 2.0m: 6 feet
 3.0m: 10 feet
 4.0m: 13 feet
 5.0m: 16 feet
 6.0m: 20 feet
 7.0m: 23 feet
 8.0m: 26 feet
 9.0m: 30 feet



MONKEY ARM—EA

WWW.MONKEYARMS.COM

SPECIFICATIONS

The Monkey Extension Arm is a flexible suspension arm for easy access to wide areas. The arm comes in 1.5 feet to 13 feet lengths and is equipped with an integral disc brake to prevent drifting. The arm is designed for use either by itself with exhaust hose and integral rollers, with a hose reel, and/or with a Monkey Arm. The arms are available in either Standard (175 pound) or Heavy-Duty (440 pound) capacity (not designed for



lifting). The arms can carry various combinations of hose reels, wall mount hose, and/or a Monkey

Arm (depending on model). The frame is made from powder-coated steel. Various hose specifications

FEATURES

- * Our flexible hose reel extension arm—perfect for firehouse and auto repair shop applications!
- * Powder-coated steel frame.
- * Extension Arm lengths from 1.5 to 13 feet.
- * Capacity of either 175 pounds or 440 pounds (not for lifting).

OPTIONS

- * Extension Arm length—1.5', 3', 6', 10', or 13'
- * Capacity—Standard @ 175 pounds (not for lifting); Heavy-Duty @ 440 pounds (not for lifting).
- * Hose Set 6" in either 7', 11', 13', 16', or 20' lengths.
- * Suspension trolley with ball bearings for hose.

DIMENSIONS, ETC.

Monkey Arms are manufactured in metric sizes but described here and on the web site in their closest English equivalent. Representative sizes and dimensions are described here. Custom sizes and materials are available.

Diameters:
 63 mm: 2.5 inches
 75 mm: 3 inches
 100 mm: 4 inches
 125 mm: 5 inches
 160 mm: 6 inches
 200 mm: 8 inches

Lengths:
 1.5m: 5 feet
 2.0m: 6 feet
 3.0m: 10 feet
 4.0m: 13 feet
 5.0m: 16 feet
 6.0m: 20 feet
 7.0m: 23 feet
 8.0m: 26 feet
 9.0m: 30 feet



MONKEY ARM FILTER M

WWW.MONKEYARMS.COM

SPECIFICATIONS

The Monkey Arm Mobile Filter is our powerful mobile filtration unit that comes with “no maintenance” replacement cartridge filters (extraction arm not included). The unit uses two-step filtration—first a combined spark-trap and pre-filter and then a cartridge filter (150 square feet) with up to 99.9 percent efficiency. Simply remove the cartridge when full and insert a replacement—it all takes just a couple of minutes!



The unit is easy to move around the shop or to bring with you on service, repair, and other temporary work. It's perfect for extracting non-

mist, non-abrasive fumes, gasses, and light, dry dusts. The fan is constructed of high-quality mild steel and is available with either 5 foot, 6-foot, or 10-foot extraction arms (Monkey Arm F). An activated carbon filter is available for controlling odors. The unit includes the fan and motor, circuit-breaker, motor cut-out, and 13 feet

FEATURES

- * Our mobile filter—perfect for welding and soldering applications!
- * Powder-coated steel housing and stand.
- * Standard in 6” diameter hose.
- * Designed for hose lengths of 10 feet or less.
- * Single-phase, 230V Motor

OPTIONS

- * Extraction Arm
- * Activated Carbon Filter
- * Holder for two extraction arms

DIMENSIONS, ETC.

Monkey Arms are manufactured in metric sizes but described here and on the web site in their closest English equivalent. Representative sizes and dimensions are described here. Custom sizes and materials are available.

Diameters:
 63 mm: 2.5 inches
 75 mm: 3 inches
 100 mm: 4 inches
 125 mm: 5 inches
 160 mm: 6 inches
 200 mm: 8 inches

Lengths:
 1.5m: 5 feet
 2.0m: 6 feet
 3.0m: 10 feet
 4.0m: 13 feet
 5.0m: 16 feet
 6.0m: 20 feet
 7.0m: 23 feet
 8.0m: 26 feet
 9.0m: 30 feet



MONKEY ARM FILTER W

WWW.MONKEYARMS.COM

SPECIFICATIONS

The Monkey Arm Wall Filter is our powerful wall-mount filtration unit that comes with “no maintenance” replacement cartridge filters (extraction arm and fan not included). The unit uses two-step filtration—first a combined spark-trap and pre-filter and then a cartridge filter (150 square feet) with up to 99.9 percent efficiency. Simply remove the cartridge when full and insert a replacement—it all takes just a couple of minutes!



The unit is standard equipped with a sturdy wall bracket. The optional fan can be mounted on the top of the box and extraction arms of 5-foot, 6-foot, or 10-foot (Monkey Arm F) are mounted on the bottom. The unit can

also be connected to a central extraction unit. It’s perfect for extracting non-mist, non-abrasive fumes, gasses, and light, dry dusts. The filter is

FEATURES

- * Our wall-mount filter—perfect for welding and soldering applications!
- * Powder-coated steel housing and stand.
- * Standard for 6” or 8” diameter arms .
- * Designed for hose lengths of 10 feet or less.

OPTIONS

- * Extraction Arm.
- * Activated Carbon Filter.
- * Replacement cartridge filters.

DIMENSIONS, ETC.

Monkey Arms are manufactured in metric sizes but described here and on the web site in their closest English equivalent. Representative sizes and dimensions are described here. Custom sizes and materials are available.

Diameters:
 63 mm: 2.5 inches
 75 mm: 3 inches
 100 mm: 4 inches
 125 mm: 5 inches
 160 mm: 6 inches
 200 mm: 8 inches

Lengths:
 1.5m: 5 feet
 2.0m: 6 feet
 3.0m: 10 feet
 4.0m: 13 feet
 5.0m: 16 feet
 6.0m: 20 feet
 7.0m: 23 feet
 8.0m: 26 feet
 9.0m: 30 feet



MONKEY ARM FILTER MM

WWW.MONKEYARMS.COM

SPECIFICATIONS

The Monkey Arm Machine Mount Filter is our powerful filtration unit for coolant or oil mist from lathing, milling, drilling, sawing, watercutting, etc. The unit can be equipped with a HEPA filter (optional) to achieve greater than 99.99% filtration. The unit filters in 7 steps: Inlet chamber/pre-filter; Aluminum mesh filter (2 stages); Glass fiber fleece (2 stages); Impinger; HEPA Filter. The fleece filters are changed periodically; the other



filters are washable. The accumulated liquid is drained back to the machine through two return pipes. The unit includes a fan and 1HP

motor (3-phase) and is available in either Standard or High-Capacity models. The housing is powder-coated steel and can be directly mounted and

FEATURES

- * Our machine-mount filter—perfect for coolant and oil-mist applications!
- * Powder-coated steel housing.
- * Seven-stage filtration.
- * Integral fan and motor.
- * Up to 99.99% efficient.

OPTIONS

- * High-Capacity Model
- * Housing-mounted pressure gauge for filter change indication.
- * Replacement Filters.

DIMENSIONS, ETC.

Monkey Arms are manufactured in metric sizes but described here and on the web site in their closest English equivalent. Representative sizes and dimensions are described here. Custom sizes and materials are available.

Diameters:
 63 mm: 2.5 inches
 75 mm: 3 inches
 100 mm: 4 inches
 125 mm: 5 inches
 160 mm: 6 inches
 200 mm: 8 inches

Lengths:
 1.5m: 5 feet
 2.0m: 6 feet
 3.0m: 10 feet
 4.0m: 13 feet
 5.0m: 16 feet
 6.0m: 20 feet
 7.0m: 23 feet
 8.0m: 26 feet
 9.0m: 30 feet



MONKEY ARMS FILTER SS

WWW.MONKEYARMS.COM

SPECIFICATIONS

The Monkey Arm Shop Service Filter is our most powerful filtration unit for coolant or oil mist from lathing, milling, drilling, sawing, watercutting, etc. The unit can be equipped with a HEPA filter (optional) to provide for up to 99.99% filtration. The unit filters with physical filtration (impinger) and deep-pleated glass fiber fleece. These filters are washable for low operating costs (the optional HEPA filters are not washable). The

unit comes complete with an integral fan and is available in three sizes: The SS1 is for 1-2 machines (1HP Fan); the SS2 is for 1-4 machines (3HP Fan), the SS4 is for 1-8 machines (5 HP Fan). The accumulated liquid is drained back to an oil return pipe. The housing is powder-coated steel. Options include integral pressure gauges for indicating filter changes, HEPA filtration, adjustable inlet damper, and extension legs. The filter



is typically floor-mounted and can be integrated with

FEATURES

- * Our shop service filter—perfect for coolant and oil-mist applications!
- * Powder-coated steel housing.
- * Three-stage filtration (with HEPA).
- * Integral fan and motor.
- * Up to 99.99% efficient.

OPTIONS

- * SS1 (1 HP); SS2 (3 HP); SS4 (5 HP)
- * HEPA Filtration.
- * Housing-mounted pressure gauge for filter change indication.
- * Replacement Filters.
- * Adjustable inlet damper
- * Extension legs (1.5 feet).

DIMENSIONS, ETC.

Monkey Arms are manufactured in metric sizes but described here and on the web site in their closest English equivalent. Representative sizes and dimensions are described here. Custom sizes and materials are available.

Diameters:
 63 mm: 2.5 inches
 75 mm: 3 inches
 100 mm: 4 inches
 125 mm: 5 inches
 160 mm: 6 inches
 200 mm: 8 inches

Lengths:
 1.5m: 5 feet
 2.0m: 6 feet
 3.0m: 10 feet
 4.0m: 13 feet
 5.0m: 16 feet
 6.0m: 20 feet
 7.0m: 23 feet
 8.0m: 26 feet
 9.0m: 30 feet




MONKEY ARM FAN

WWW.MONKEYARMS.COM

SPECIFICATIONS

The Monkey Arm Fan is our economical line of centrifugal fans that compliment our line of high-quality arms. The key feature of the fans is integral mounting for a visually clean, neat installation. They are perfect for non-mist, non-abrasive ventilation of fumes, gasses, and light, dry dusts. The design is compact, smooth, quiet, and efficient. The fan is constructed of high-quality mild steel and is available in either 1/2 or 1 H.P.

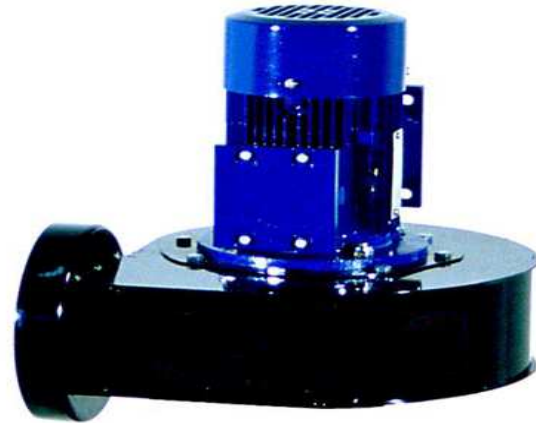

models. The fan is available in a Standard version for hose lengths 13 feet or less and a higher-suction Turbo version for longer hose lengths. The

fans are available with either single-phase or three-phase motors. The fans are available for 5-inch, 6-inch, and 8-inch diameter hoses. The

FEATURES

- * Our line of integral centrifugal fans—perfect for welding and soldering applications!
- * Powder-coated steel housing.
- * Available for mounting from wall bracket with and without turning flange.
- * Standard in 5", 6" or 8" diameter inlet
- * Standard version for hose lengths less than 13 feet; Turbo for hose lengths greater than 13 feet.

OPTIONS

- * Motor Size— 1/2-HP (770 CFM Freewheel)
- * Motor Size—1-HP (1,240 CFM Freewheel)
- * Single- or Three-Phase power.
- * Fan Bracket and Inlet for 5", 6" and 8"
- * Turning Flange for 6" and 8"

DIMENSIONS, ETC.

Monkey Arms are manufactured in metric sizes but described here and on the web site in their closest English equivalent. Representative sizes and dimensions are described here. Custom sizes and materials are available.

Diameters:
 63 mm: 2.5 inches
 75 mm: 3 inches
 100 mm: 4 inches
 125 mm: 5 inches
 160 mm: 6 inches
 200 mm: 8 inches

Lengths:
 1.5m: 5 feet
 2.0m: 6 feet
 3.0m: 10 feet
 4.0m: 13 feet
 5.0m: 16 feet
 6.0m: 20 feet
 7.0m: 23 feet
 8.0m: 26 feet
 9.0m: 30 feet



MONKEY ARM FAN-M

WWW.MONKEYARMS.COM

SPECIFICATIONS

The Monkey Arm Fan— M is our powerful mobile centrifugal ventilation fan that comes as a complete unit. The unit is easy to bring with you on service, repair, and other temporary work. It's perfect for extracting non-mist, non-abrasive fumes, gasses, and light, dry dusts. The design is compact, smooth, quiet, and efficient. The fan is constructed of high-quality mild steel and is available in either ½ or 1 H.P. models. The fan comes



with either 6 foot, 9 foot, or 18 foot hose lengths in either 6-inch or 8-inch diameters. The unit

includes the motor, circuit-breaker, motor cut-out, and 13 feet of cable with plug. The fan is

FEATURES

- * Our mobile centrifugal fans—perfect for welding and soldering applications!
- * Powder-coated steel housing and stand.
- * Standard in 8" diameter inlet—6" available.
- * Designed for hose lengths of 13 feet or less.

OPTIONS

- * Motor Size— ½-HP (770 CFM Freewheel)
- * Motor Size—1-HP (1,240 CFM Freewheel)
- * Single- or Three-Phase power.
- * Hose lengths of 6 feet, 10 feet, or 13 feet.
- * Hose Diameters of 6" and 8"

DIMENSIONS, ETC.

Monkey Arms are manufactured in metric sizes but described here and on the web site in their closest English equivalent. Representative sizes and dimensions are described here. Custom sizes and materials are available.

Diameters:
 63 mm: 2.5 inches
 75 mm: 3 inches
 100 mm: 4 inches
 125 mm: 5 inches
 160 mm: 6 inches
 200 mm: 8 inches

Lengths:
 1.5m: 5 feet
 2.0m: 6 feet
 3.0m: 10 feet
 4.0m: 13 feet
 5.0m: 16 feet
 6.0m: 20 feet
 7.0m: 23 feet
 8.0m: 26 feet
 9.0m: 30 feet